


Advanced combustion control for a wood log stove

Expert workshop - Highly Efficient and Clean Wood Log Stoves
Berlin 29 October 2015

Jytte Boll Illerup
Brian Brun Hansen
Weigang Lin
Joachim Nickelsen
Kim Dam-Johansen

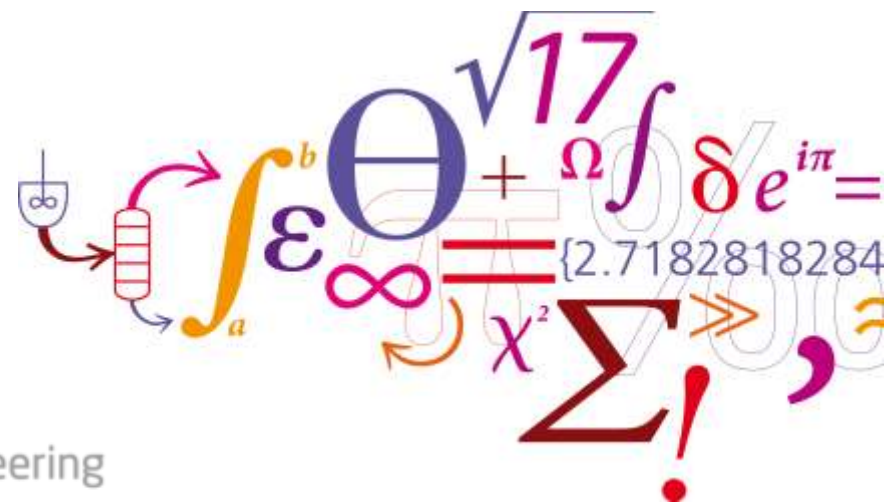

Intelligent Heat System

High-energy efficient wood stoves with low emissions

- Collaboration between HWAM A/S and DTU Chemical Engineering
- Periode 2011 – 2015
- EUDP - project
(Energy Technology Development and Demonstration Program)

Development of a new automatically controlled wood stove with:

- High energy efficiency
- Reduced emissions (CO, particles etc.)
- High comfort for the wood stove users



Main results

- *A new advanced control system has been developed based on experiments conducted at experimental facilities at HWAM og DTU Chemical Engineering*
- *HWAM has launched an automatically controlled wood stove on the market*
- *Field and laboratory tests have shown reduced emissions and higher efficiency for stoves with the control system*

Content

- Background for the project – why an automatic control system?
- Concept of the automatically controlled wood stove
- Our results from
 - Field tests
 - Experiments at the wood stove set-up at DTU Chemical Engineering

Regulation and legislation



New wood stoves are approved according to national and European standards.

Standards:

Approval of Wood stoves	Eff. (%)	CO (mg/Nm³)	PM (mg/Nm³)	PM (g/kg)	OGC (mg/Nm³)
Danish Statutory of order	-		<40	<5	<150
Danish Statutory of order (from 2017)	-		<30	<4	<120
Swan label (optional)	≥76	≤1250		<3	<100
Swan label (from 2017)	≥76	≤1250		<2	<100

The emissions can be much higher when the stoves are used by ordinary wood stove users

Challenges

This is due to challenging conditions when using a wood stove:

- batch firing in a small combustion chamber
- use of different wood types and wood log sizes
- combustion air flows and the fuel load are manually controlled

Difficult to achieve an optimal combustion


Improved technologies

Modern stoves with air staging:

Three combustion air inlets:

- Primary air at the bottom (ignition)
- Secondary air at the top of the front window (air-wash, second combustion)
- Tertiary air at the back wall (high temperature gas combustion)

However, well-designed stoves can also cause high emissions and low efficiency

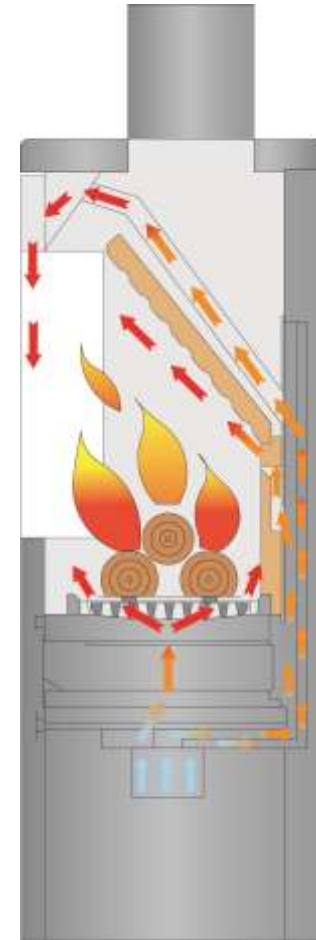

Field tests – measurements at stoves in private homes



Field tests in six private homes


Measured 1 week:

- Existing (modern) stove
- Automatically controlled wood stove
- O_2 , CO_2 , CO , flue gas temp.
- Amount of wood
- Temp. in- and outdoor

It is difficult to control manually the combustion air flows in an optimal way.

Manually controlled wood stove – 1


Ignition Flame Char combustion

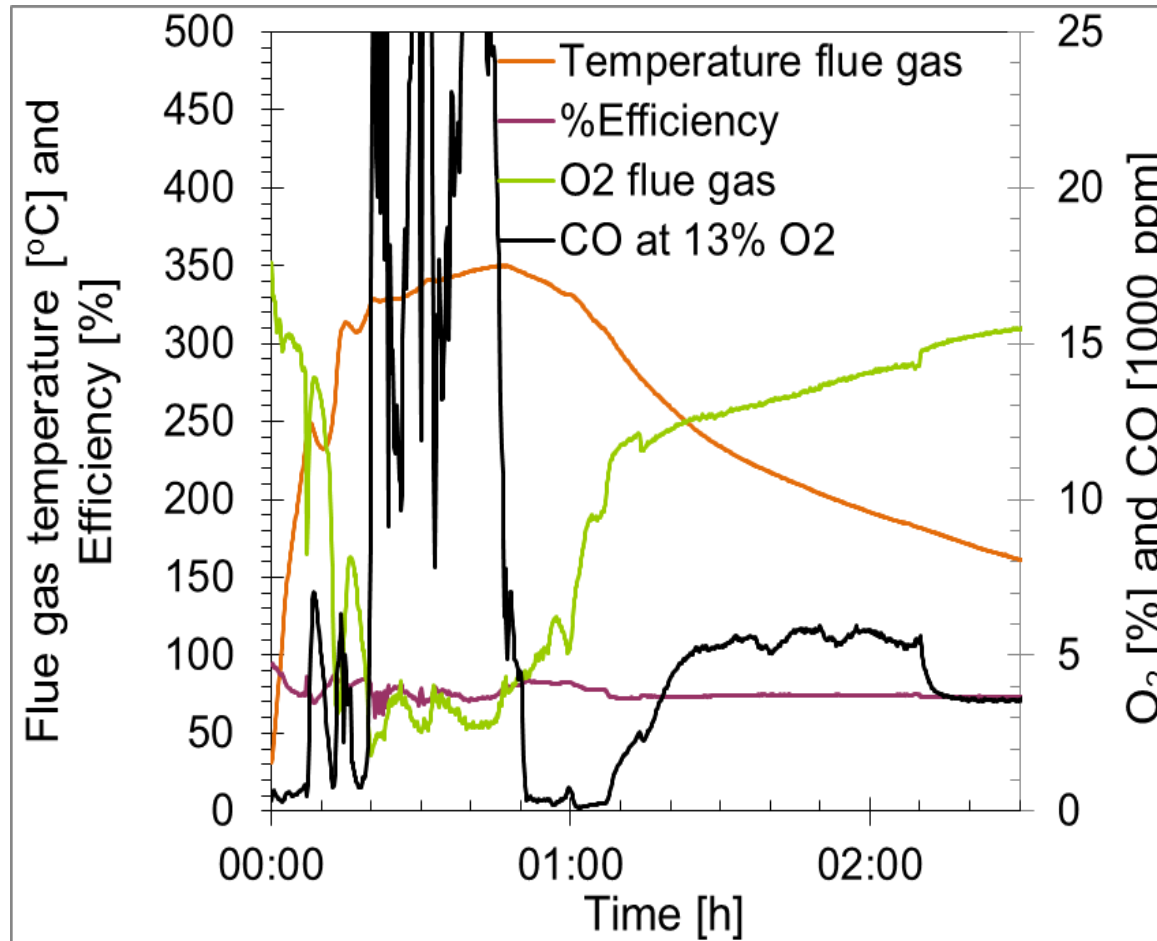

Lack of combustion air in the flame phase and too much air in the char combustion phase

One combustion cycle

Manually controlled wood stove – 2

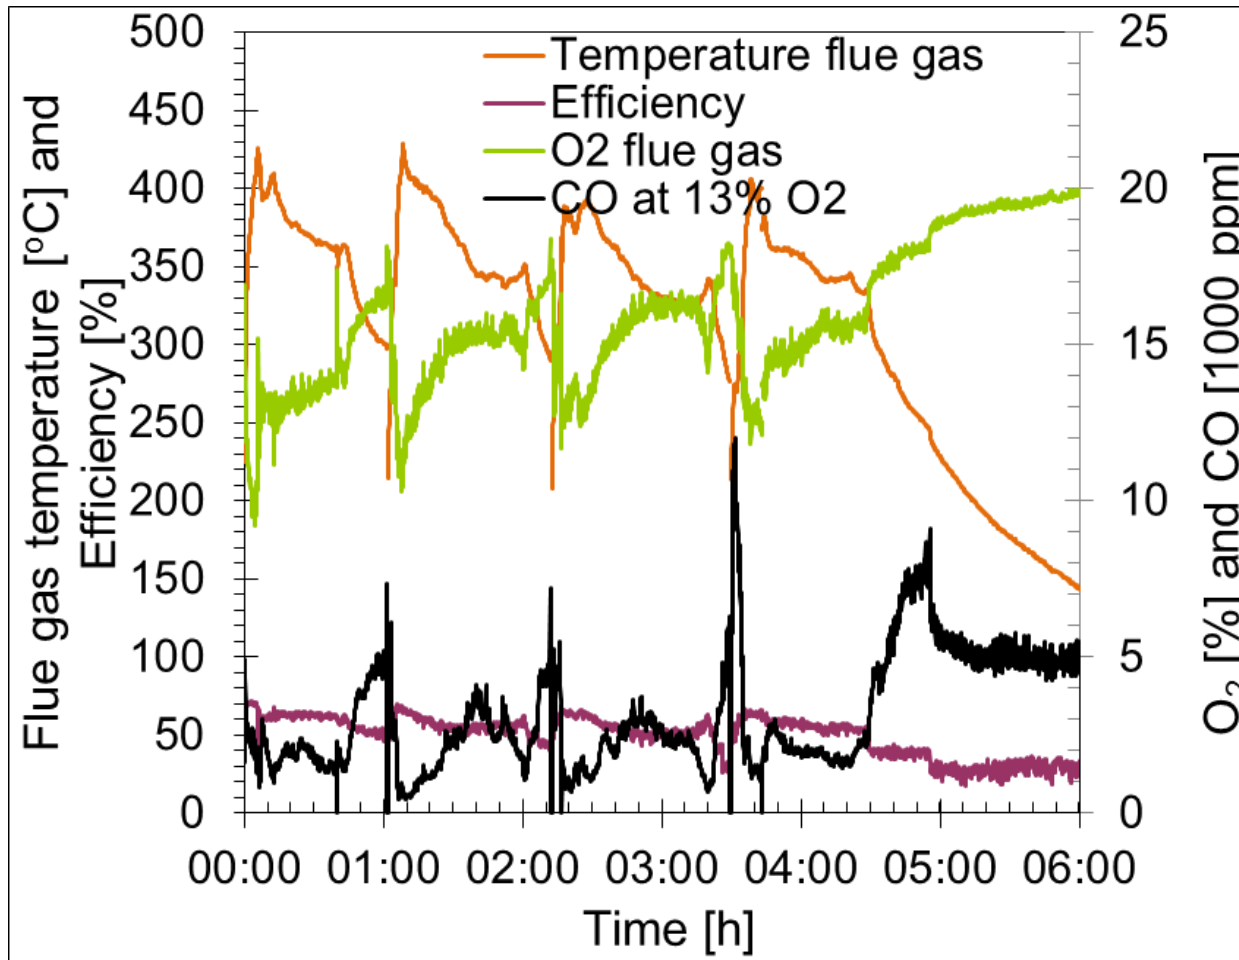

High excess air and temperature in both the flame phase and the char combustion phase

A large potential for improving the combustion process by optimizing the combustion air flows

Four combustion cycles

Automatically controlled wood stove



Modern wood stove

+

Air box (3 motor-controlled valves and a software program)

+

Process control (the process parameters are the O₂ concentration and the temperature in the flue gas)

+

Remote control to starts the combustion and set the room temperature


Control of the air supply

The three air inlets are automatically controlled by


- a software program based on the definition of five combustion phases
- and the process parameters – measured temperature and O_2 in the flue gas



Overall concept of the software

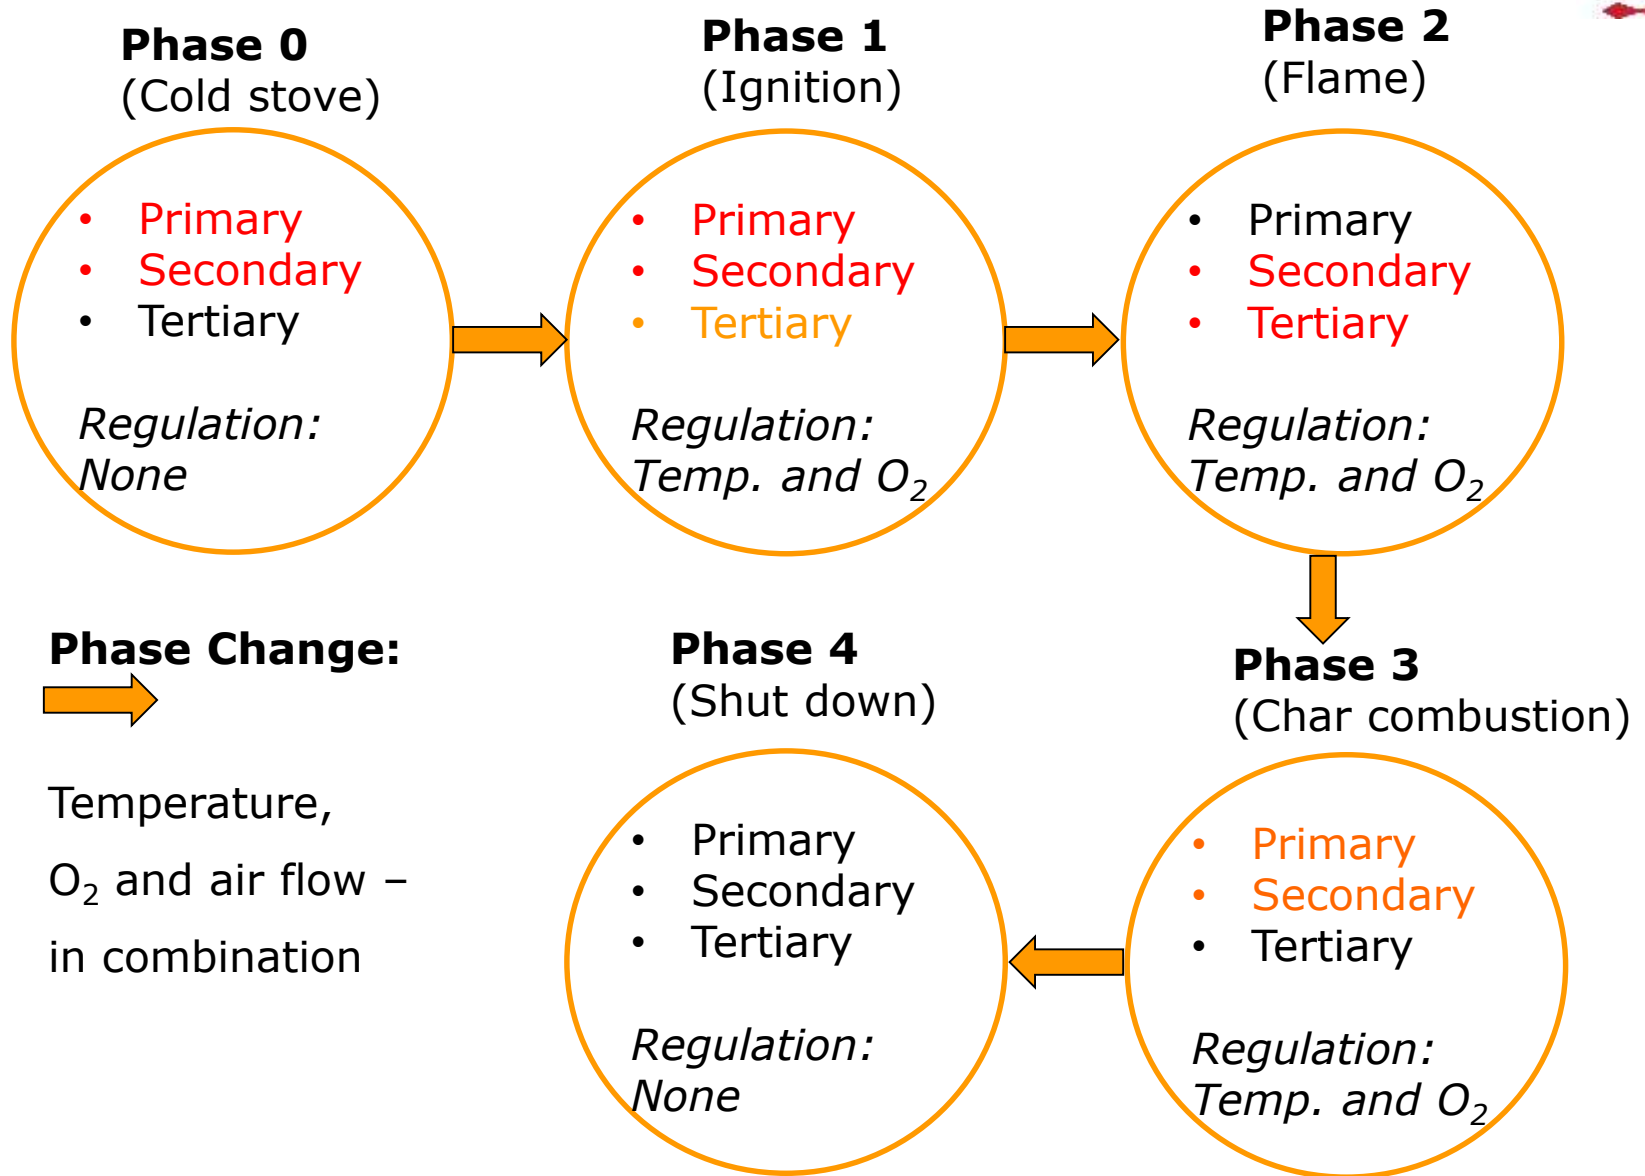

Standard combustion cycle

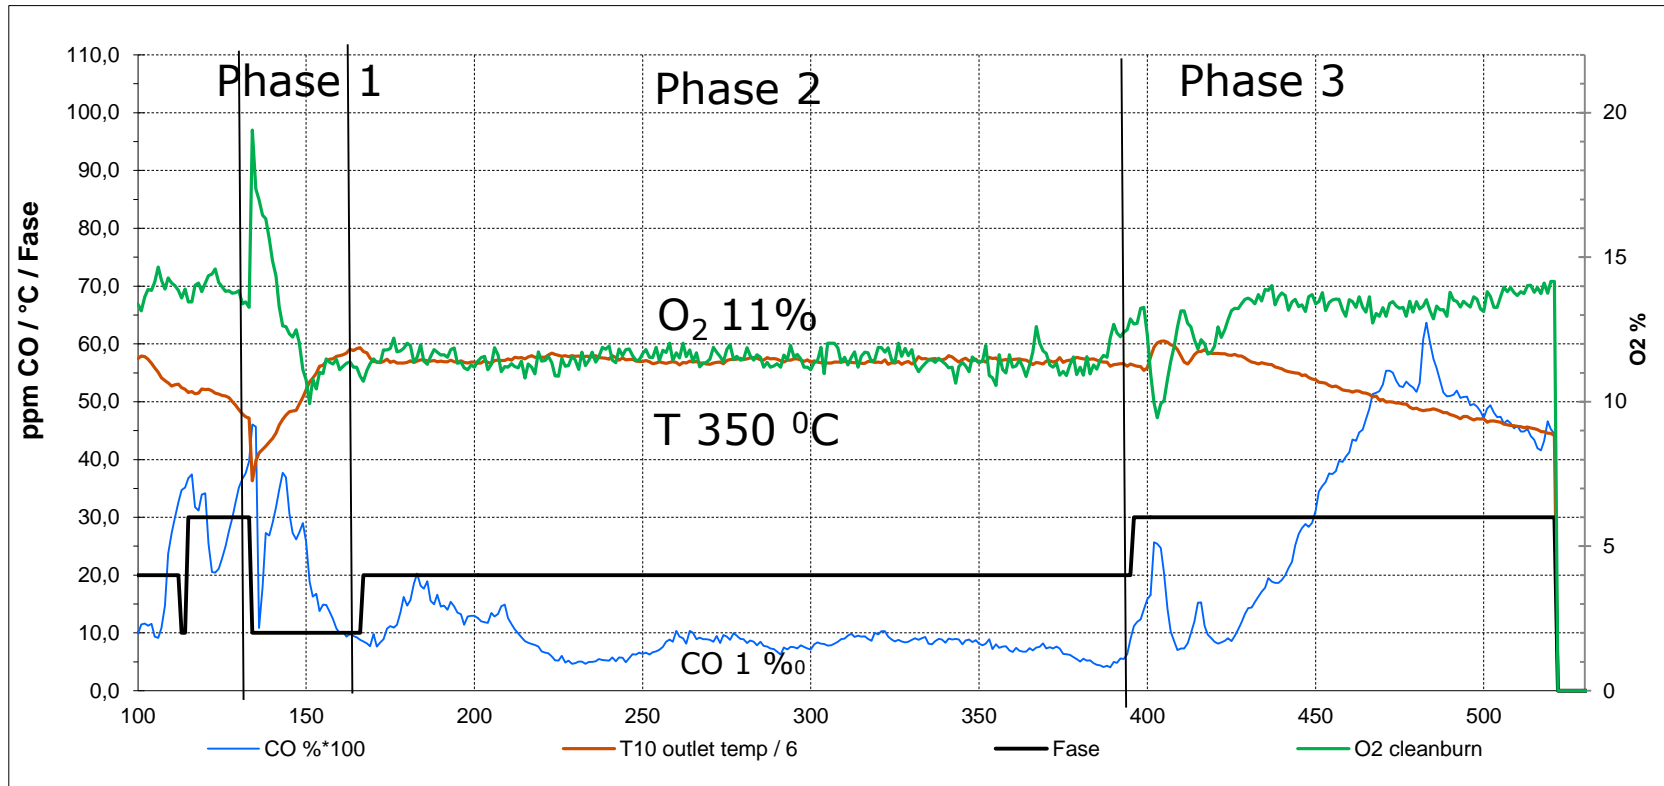

Temperature and O₂ concentration constant and optimal during most of the combustion cycle

Phase 1:

- Ignition of wood
- A few minutes


Phase 2:

- Combustion of pyrolysis gases
- Intensive combustion with flames
- 25 - 30 minutes

Phase 3:


- Combustion of char
- The combustion intensity decreases
- The temperature decreases, the O₂ and CO emission increase

The same user

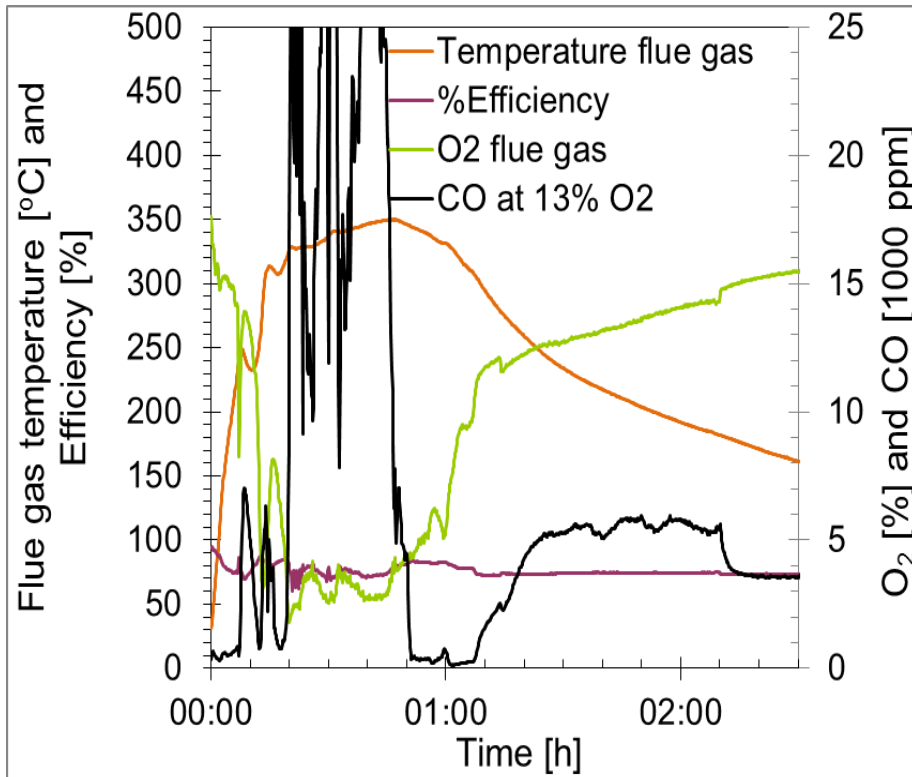

Manually controlled



Lack of combustion air in the flame phase and too much air in the char combustion phase

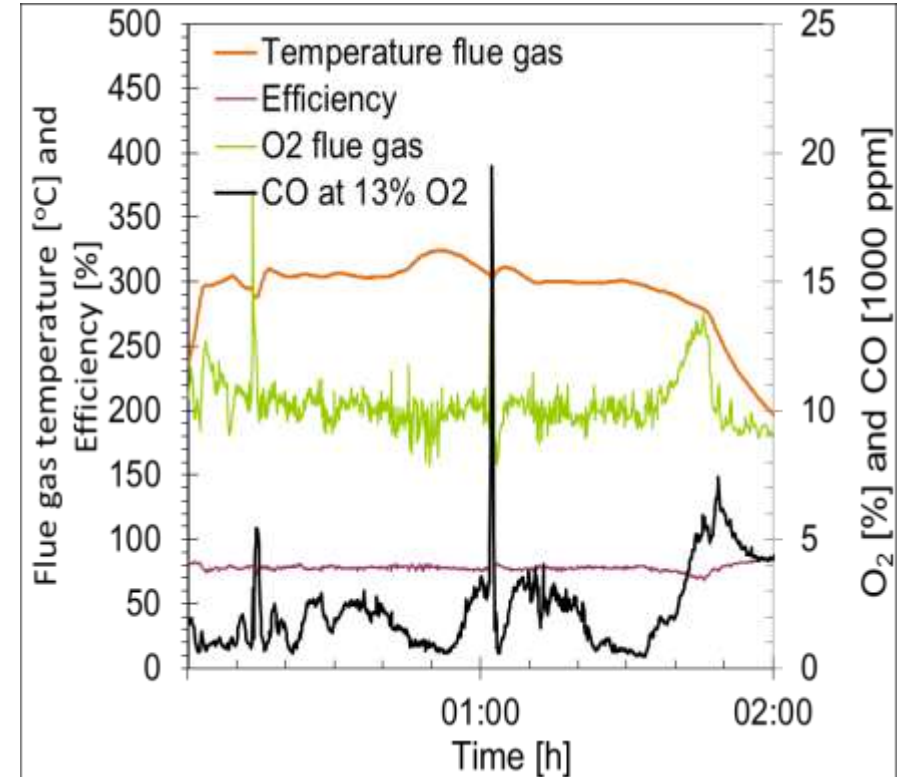

Automatically controlled

Stable O₂ and temperature, and low CO

The same user

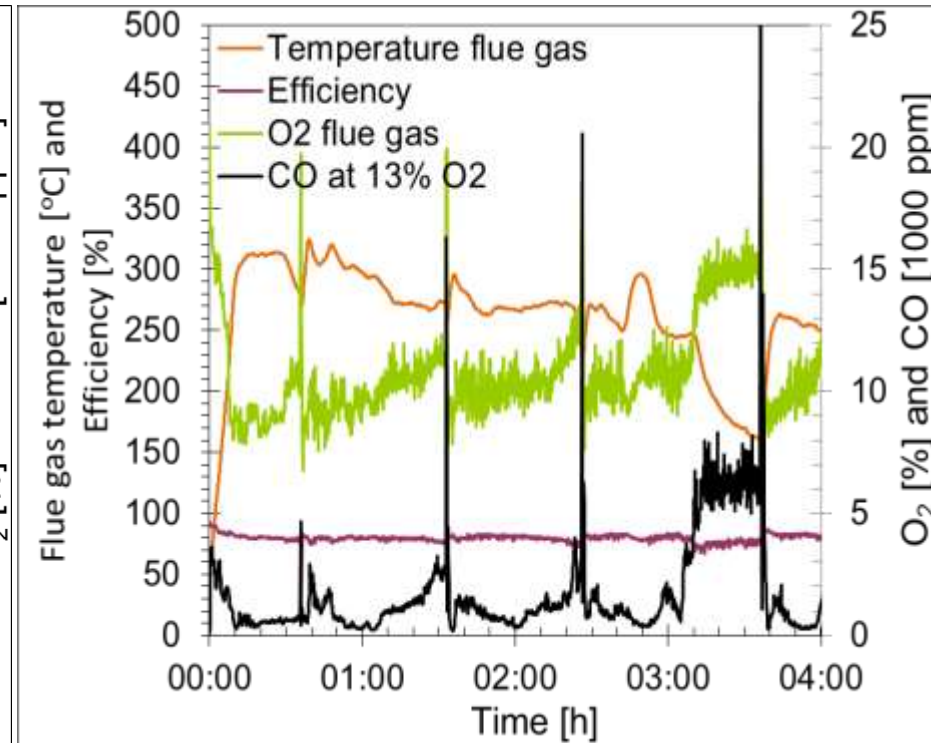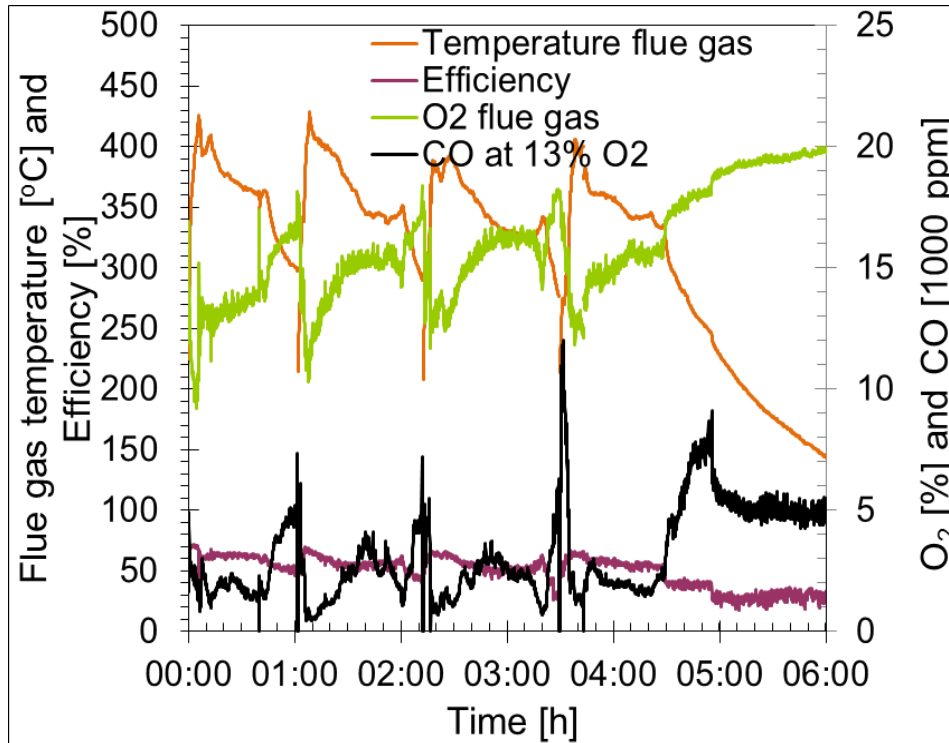

Manually controlled

High excess air and temperature in both the flame phase and the char combustion phase


Automatically controlled


Lower and optimal O₂ and temperature, and *much* higher efficiency

Experimental setup

Including: woodstove, stack, dilution tunnel, sampling sites, filters for particle collection and panel for gaseous analysis.

- PM measurements:
- Filter collection based on the Noweigan Standard NS-3058
 - Scanning mobility particle sizer (SMPS)

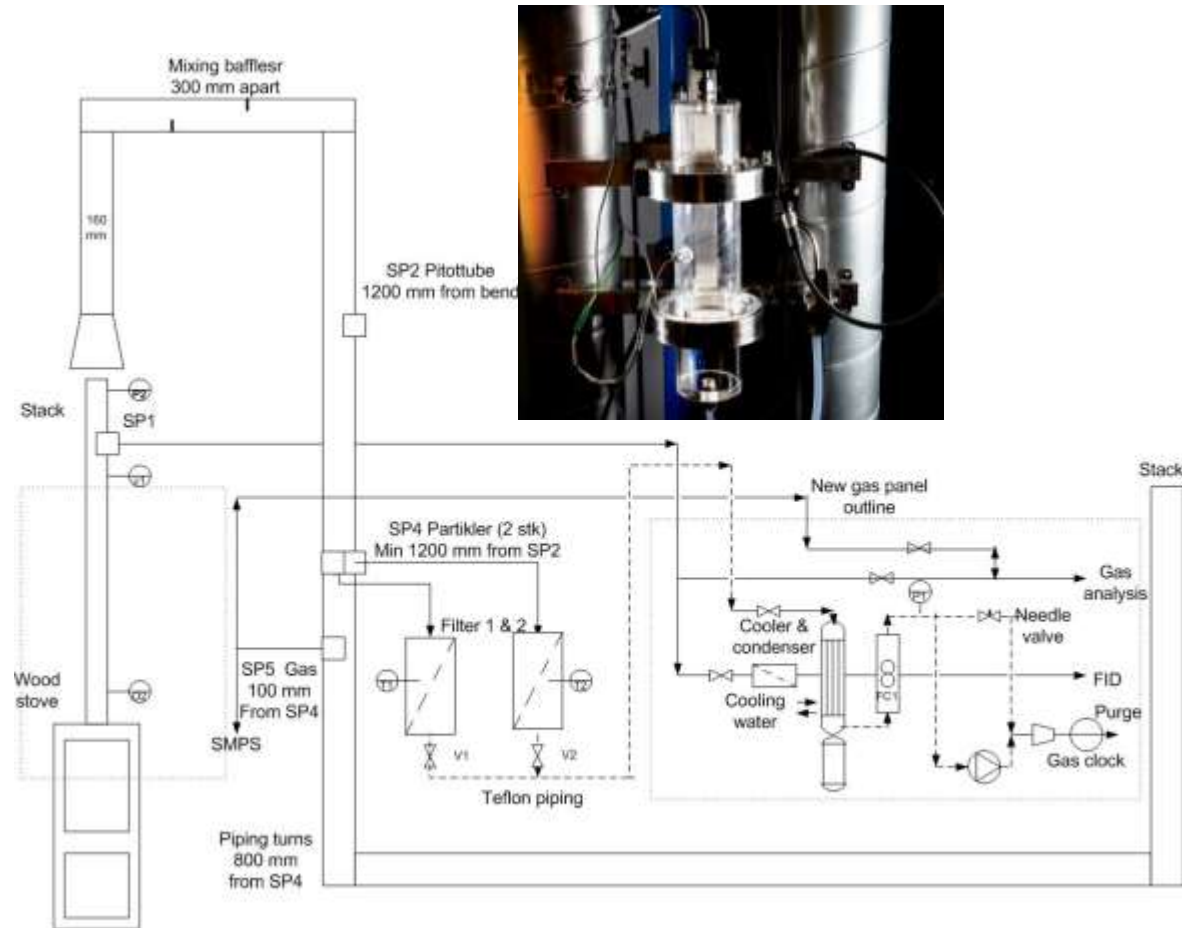

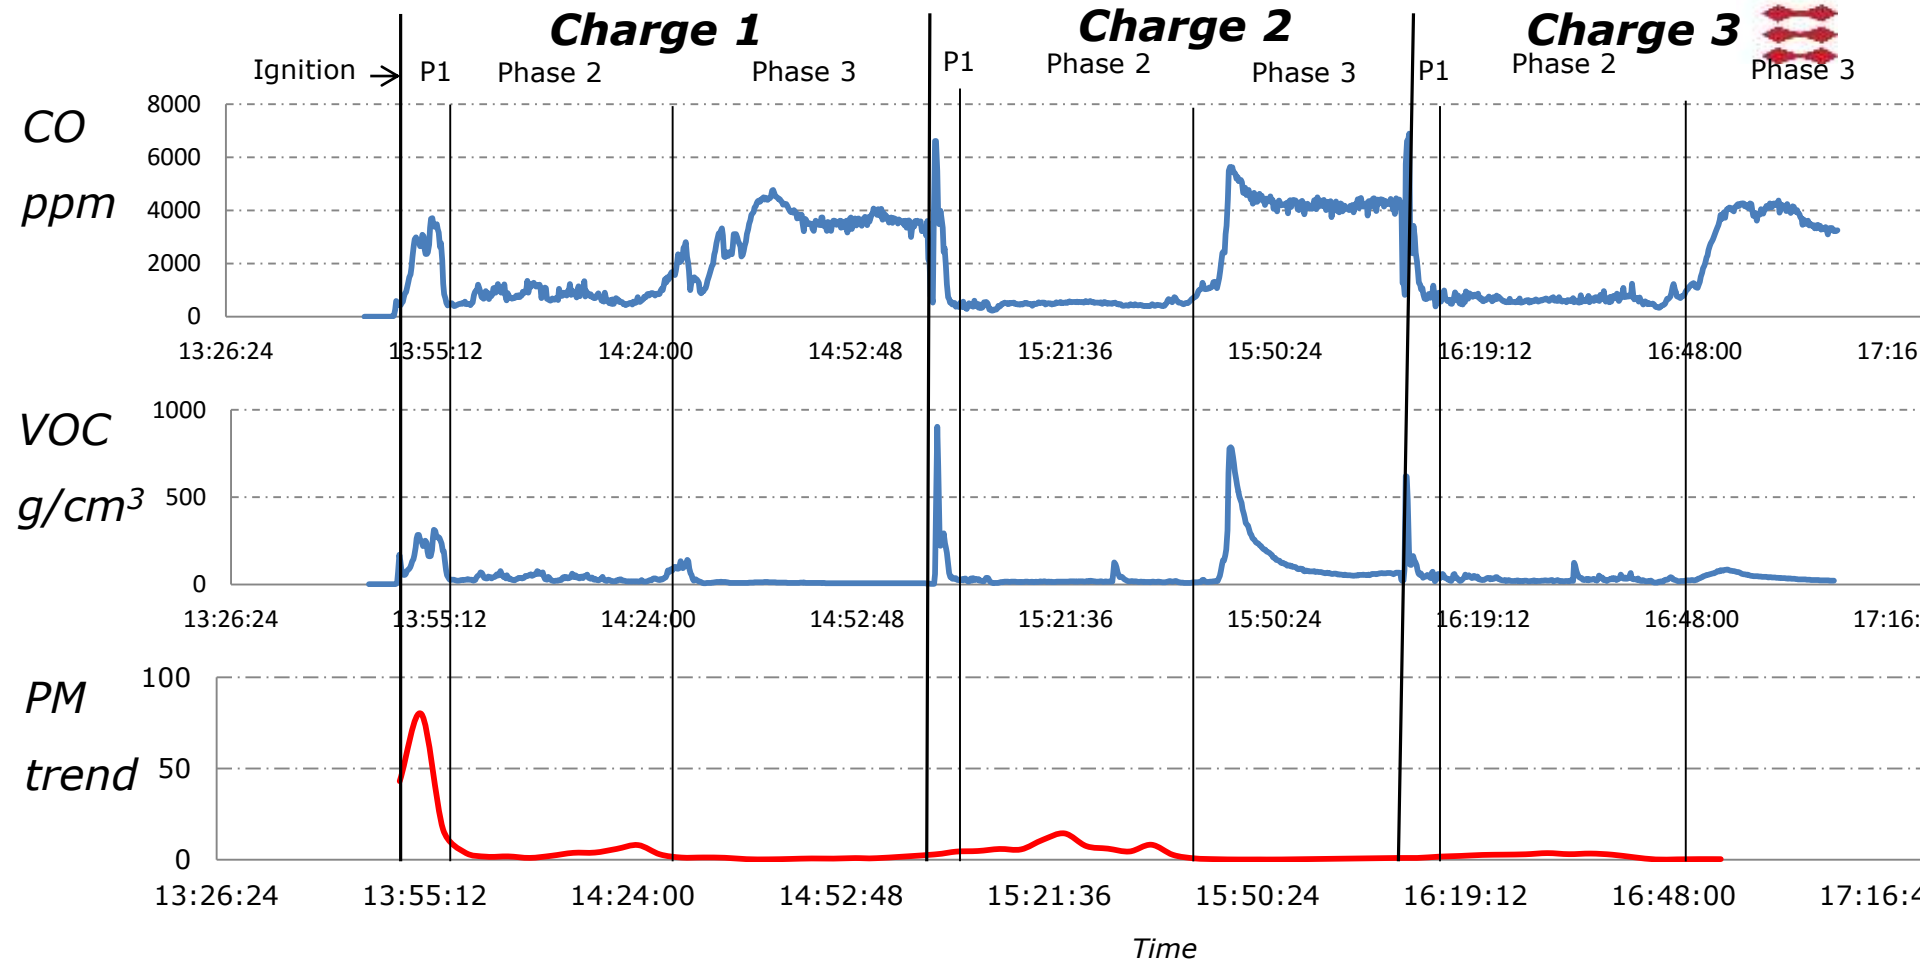


- Increase in CO/VOC/PM in phase 1
- PM peak but low CO/VOC in phase 2
- Increase in CO (VOC) but low PM in phase 3

PM composition

0-15 min

15-30 min

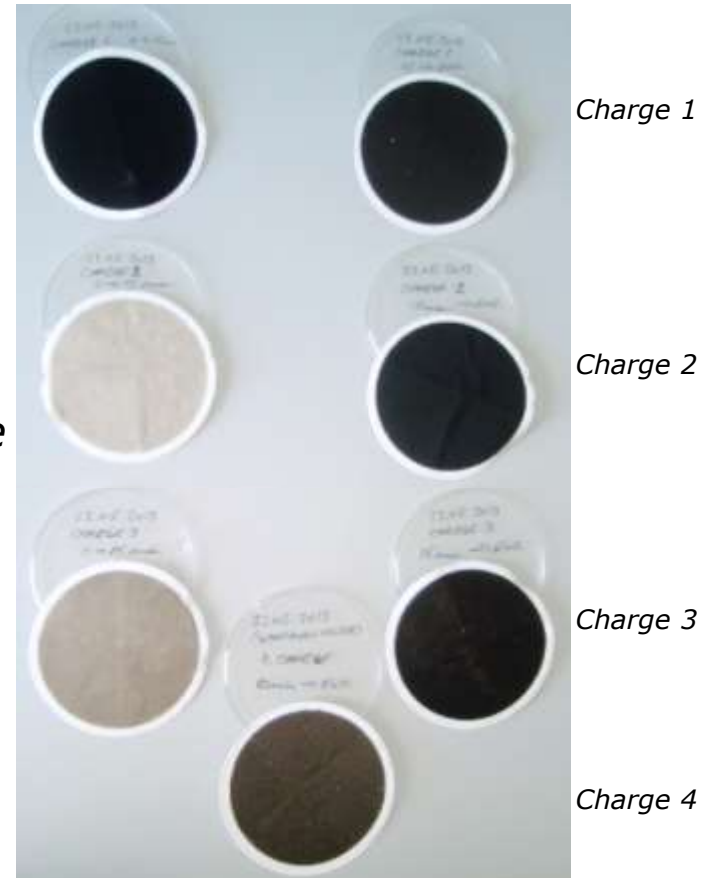

Charge 1: 1.8 ± 0.2 g / kgdry

Charge 2: 1.8 ± 0.8 g / kgdry

Charge 3: 1.4 ± 0.4 g / kgdry

Charge 4: 0.5 g / kgdry

- Condensable organic compounds
Example hexane ($T_{boil} = 69$ °C)
Example benzene ($T_{boil} = 80$ °C)
Initial release of volatiles from fuel
Temperature/mixing in the combustion zone
- Soot/Black carbon
High temperature & O_2 lean formation
Potentially caused by insufficient mixing

Conclusions

- An automatically controlled wood stove, HWAM IHS, has been developed and launched on the market.
- Results have shown significantly reduced emissions and high efficiency for the automatically controlled stoves compared to manually controlled stoves.
- The new control system ensures improved stove operation even when used by private wood stove owners.



Thanks for your attention

